



OR H Series

500/1000 P2.6 P2.9 P3.91 P4.81

Dual Service Frontal Rear Rental LED Display

ultra-lightweight and space saving, with a number of core technologies.
Innovative structural design, Seamless Display and Visual
Effects, Supoort Right Angle Installation

1000W Series Rental LED Screen

500/1000 Series Rental LED Display New design incorporates many aesthetic elements, adopts High strength die-casting aluminum, only 7.5kg per cabinet better performance with high definition visual display

This is a watermark for the trial version, register to get the full one!

Benefits for registered users:

- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.

[Remove Watermark Now](#)



IP65 Protection



Thin Cabinet



Fast-assembly



High Refresh Rate



High Contrast



Front/Rear Service




Gray Scale 16bit



Wide Viewing Angle

Lightweight and Thin

Portable and good stability with weight of 7.5kg/cabinet and thickness of 80mm.the feature of lightweight make the LED display is easy to carry, transport and install, saving good amount of money on your labor costs.

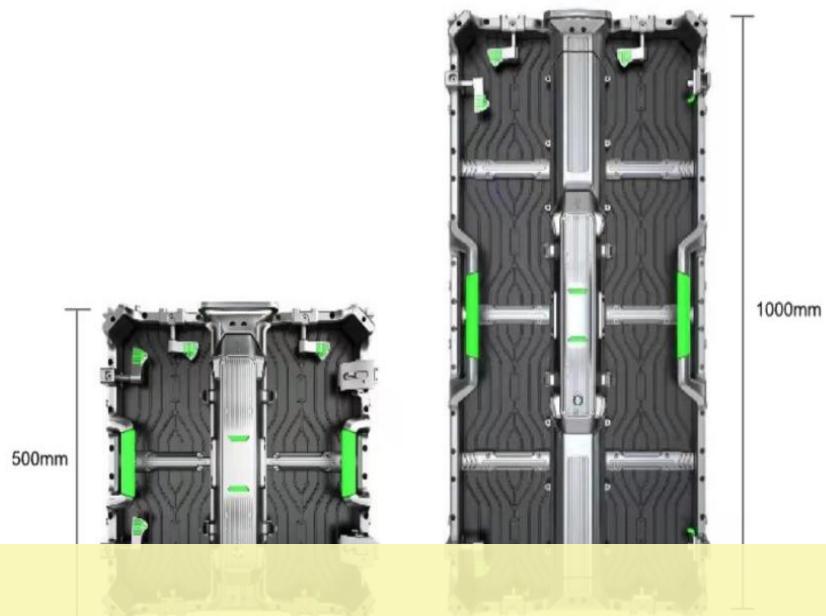


This is a watermark for the trial version, register to get the full one!

Benefits for registered users:

- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.

Remove Watermark Now

structural design,avant-garde body lines,give you extraordinary experience

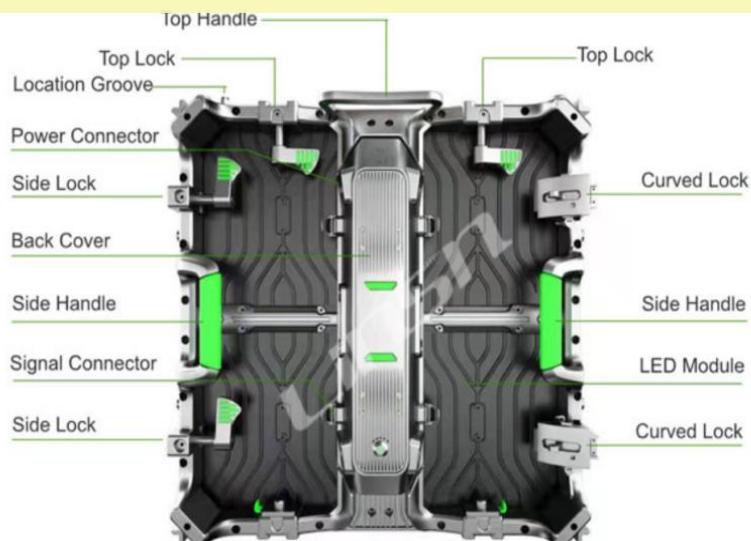

Support Right Angle Installation

Supports 90° right angle LED display installation to meet some special buildings and applications.



Detachable Back Cover

Adopts Optimized Control Box with Quick removable without any tools optional, the back box (includes power supply and control cards) is removable quickly for replacement and maintain.

This is a watermark for the trial version, register to get the full one!

Benefits for registered users:


- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.

[Remove Watermark Now](#)




Front & Real Maintenance

500 Series Rental LED Display is dual maintenance product, not only 100% front accessible but also can do rear service..The LED panels are magnetic and can be removed by tools from front side in 5 seconds. easy and convient, save you cost and labor

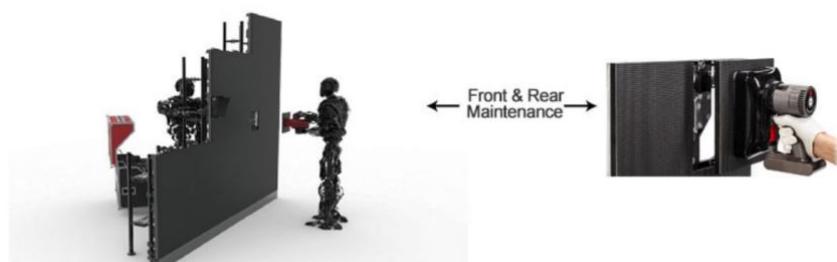

Seamless Display and Better Visual Effects

High precision aluminum cabinet frame make seamless splicing image and video display, offering you the perfect visual experience you desire from any angles. The picture quality confronts viewers with an entirely new sensory experience.

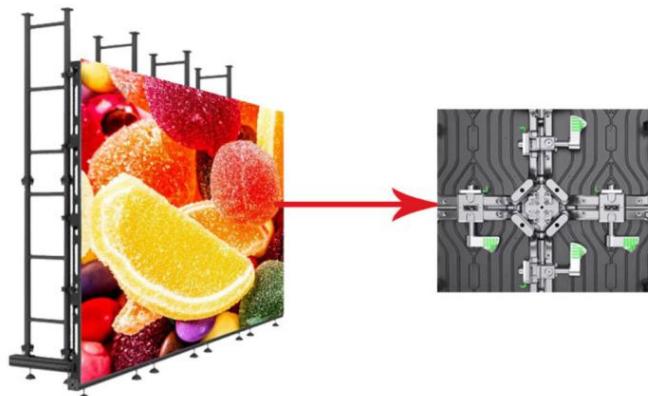

Curved Installation

In order to meet the various aspects of the LED screen field. 500/1000 series led display design for Curved Installation. Curved with every 2.5° between -10° and 10°, which can make convex and concave.

This is a watermark for the trial version, register to get the full one!

Benefits for registered users:

- 1.No watermark on the output documents.
- 2.Can operate scanned PDF files via OCR.
- 3.No page quantity limitations for converted PDF files.


[Remove Watermark Now](#)

Multi Installation Way of Cabinet


Support 3 installation ways of cabinet with hanging installation, concave& convex installation, stack installation.



Hanging installation



Concave & Convex



Stack installation

Products

			
P2.604	P2.976	P3.91	P4.81
96*96 dots/module 250*250mm Panel 500*1000mm Outdoor Display	84*84 dots/module 250*250mm Panel 500*1000mm Outdoor Display	64*64 dots/module 250*250mm Panel 500*1000mm Outdoor Display	52*52 dots/module 250*250mm Panel 500*1000mm Outdoor Display

OR H Series Parameters

This is a watermark for the trial version, register to get the full one!

[Remove Watermark Now](#)

Item	P2.6	P2.9	P3.91	P4.81
Pixel Pitch	2.61	2.91	3.91	4.81
LED Type	SMD1415	SMD1415	SMD1921	1921
Module Resolution	96dots x 96dots	84dots x 84dots	64 x 64dots	52 x 52dots
Driving Mode	1/21s	1/21s	1/21s	1/21s
Module Pix.	96 x 96	84 x 84	64 x 64	52 x 52
Module Size	1250*1250	1000*1000	640*640	520*520
Cabinet	2.6	2.9	3.91	4.81
Cabinet Size	1920*960*110	1920*960*110	1920*960*110	1920*960*110
Dot Density(dots/m ²)	1,450	1,12,896	65,536	43,264
Minimum Viewing Distance	≥2.6m	≥2.9m	≥3.9m	≥4.8m
Brightness	≥4,500nits	≥4,500nits	≥5,000nits	≥5,000nits
IP Grade	IP65	IP65	IP65	IP65
Refresh Rate	1920Hz~3,840Hz	1920Hz~3,840Hz	1920Hz~3,840Hz	1920Hz~3,840Hz
Gray Scale	12~16bits	12~16bits	12~16bits	12~16bits
Viewing Angle	160°/160°	160°/160°	160°/160°	160°/160°
Maximum Power Consumption	800(W/m ²)	800(W/m ²)	800(W/m ²)	800(W/m ²)
Average Power Consumption	360(W/m ²)	360(W/m ²)	360(W/m ²)	360(W/m ²)
Input Voltage	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz
Operating Temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C
Operating Humidity	10%~90%	10%~90%	10%~90%	10%~90%
Cabinet Material	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cabinet Weight	7.5kg/panel	7.5kg/panel	7.5kg/panel	7.5kg/panel
Operating System	Windows (Win7,Win8,etc.)	Windows (Win7,Win10,etc.)	Windows (Win7,Win10,etc.)	Windows (Win7,Win10,etc.)
Signal Source Compatibility	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc