




IR D Series

Indoor Rental LED Display

P1.56,P1.9,P2.6,P2.9,P3.9,P4.8

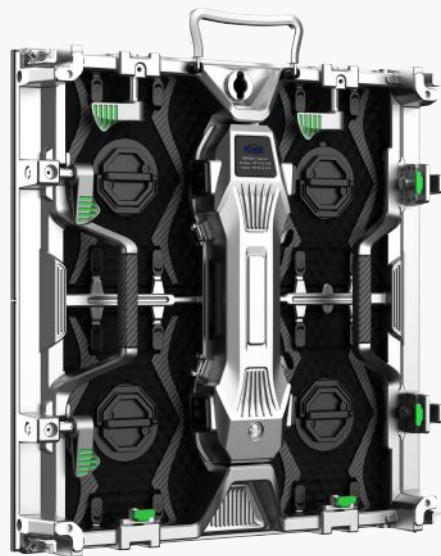

Great Cabinet Design



Light Weight



Seamless Connection



Excellent Performance



Curve Capabilities



Easy Repair



1,920Hz ~ 3,840Hz



Various Shapes

Product Description

Great Cabinet Design


To meet the requirements of customers in different application scenarios, 2 cabinet sizes are available.

One of the cabinet size is 500mm x 500mm, and another one is 500mm x 1000mm, which makes installation flexible during the event.




Light Weight


As the cabinet uses die-cast aluminum material, the weight of the panel is only 9 kgs, and it has great heat dissipation.

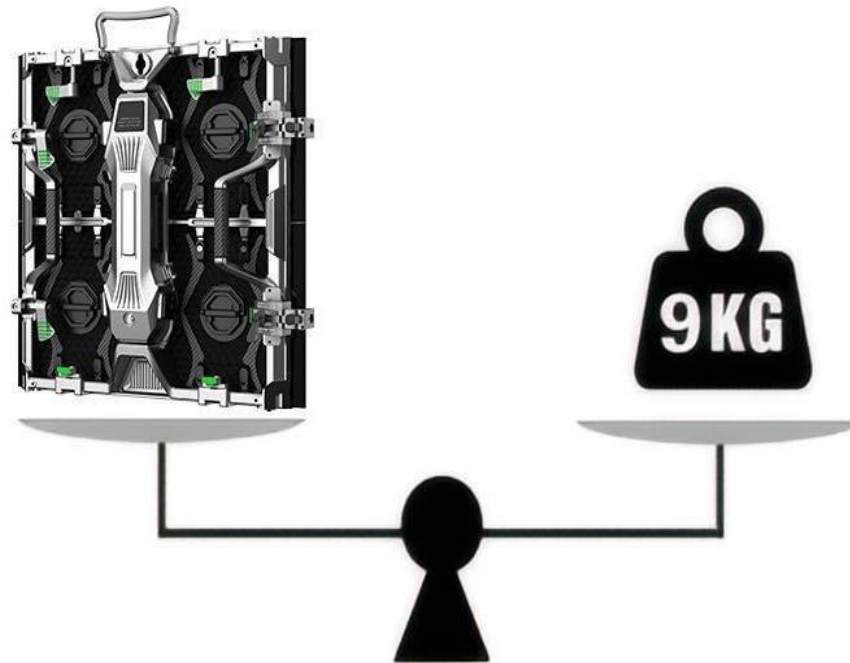

Curved Design

The lock is very secure and strong. It can be designed to be curved to form a curved screen from -15° (convex) to $+15^{\circ}$ (concave).

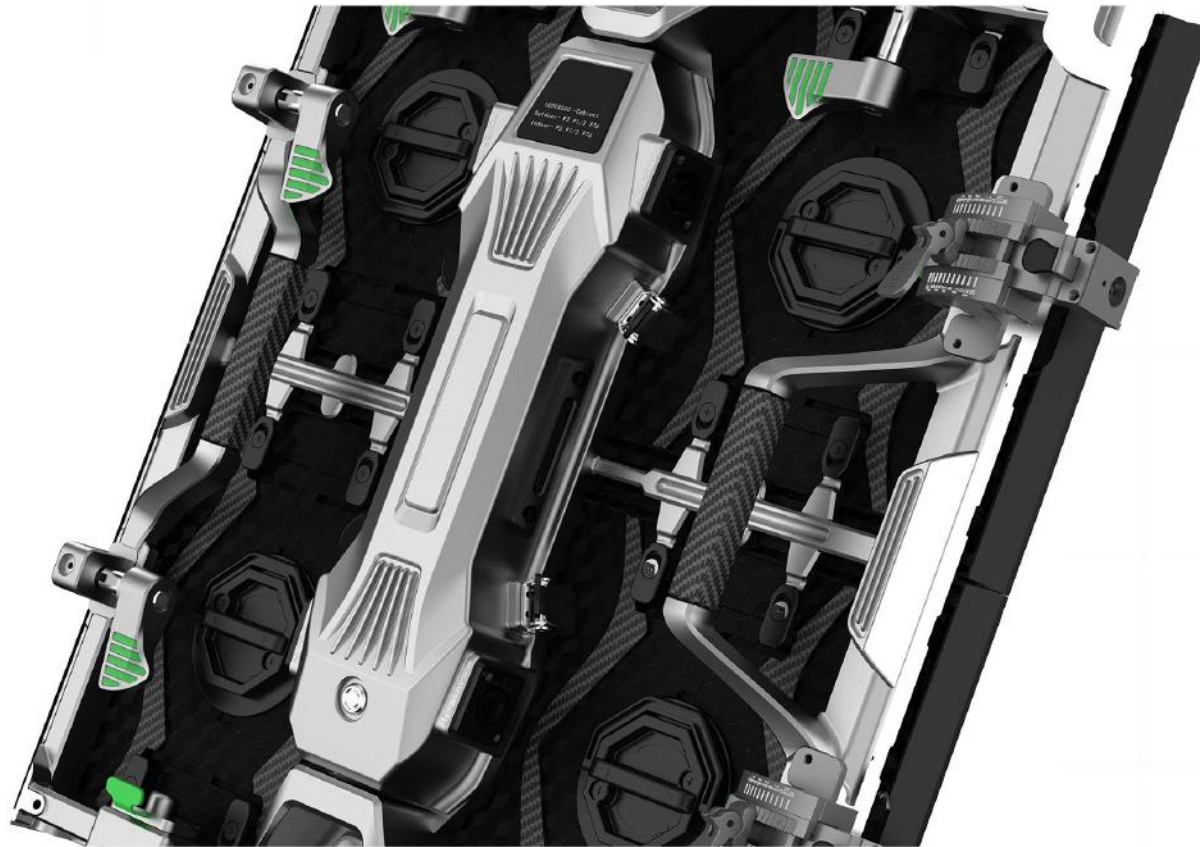

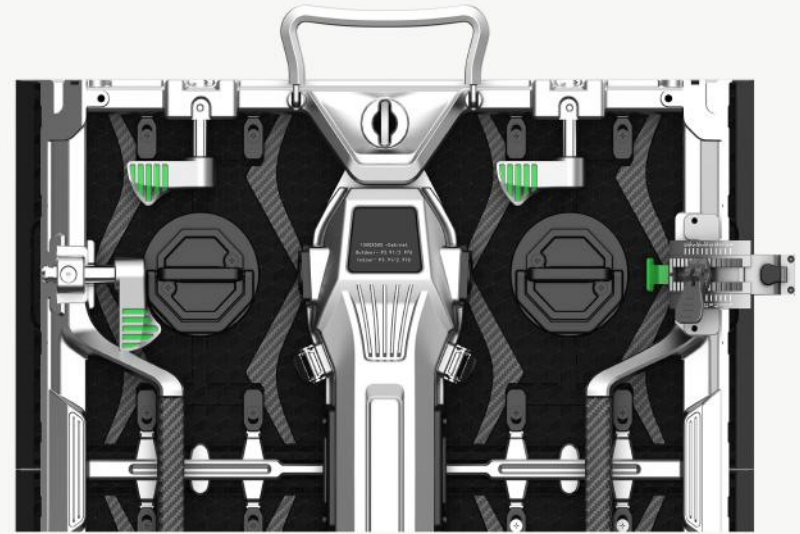

Excellent visual effort

With its excellent video performance, create an immersive and dynamic visual experience. Provide viewers with a dynamic and engaging visual experience.



Application Files

Activity; Stages; Exhibition hall; Sports Events.



Parameters

Item	P1.56	P1.9	P2.6	P2.9	P3.91	P4.81
Pixel Pitch	1.56mm	1.953mm	2.604mm	2.976mm	3.91mm	4.81mm
LED Type	SMD1515	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020
Module Resolution	160dots x 160dots	128dots x 128dots	96dots x 96dots	84dots x 84dots	64dots x 64dots	52dots x 52dots
Driving Mode	1/32scan	1/32scan	1/24scan	1/21scan	1/16scan	1/13scan
Module Pixels	25,600dots	16,384dots	9,216dots	7,056dots	4,096dots	2,704dots
Module Size(mm)	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250
Cabinet Size(mm)	500 x 500/1000	500 x 500/1000	500 x 500/1000	500 x 500/1000	500 x 500/1000	500 x 500/1000
Cabinet Resolution(dots)	320 x 320/640dots	258 x 258/516dots	192 x 192/384dots	168 x 168/336dots	128 x 128/256dots	104 x 104/208dots
Pixel Density(dots/m²)	409,600	282,144	147,456	112,896	65,536	43,264
Minimum Viewing Distance	≥1.5m	≥1.9m	≥2.6m	≥2.9m	≥3.9m	≥4.8m
Brightness	600~800nits	600~800nits	600~800nits	600~800nits	≥800nits	≥800nits
IP Grade	IP43	IP43	IP43	IP43	IP43	IP43
Refresh Rate	1920Hz~7,680Hz	1920Hz~7,680Hz	1920Hz~7,680Hz	1920Hz~7,680Hz	1920Hz~7,680Hz	1920Hz~7,680Hz
Gray Scale	12~16bits	12~16bits	12~16bits	12~16bits	12~16bits	12~16bits
Viewing Angle	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Maximum Power Consumption	520(W/m²)	520(W/m²)	520(W/m²)	520(W/m²)	520(W/m²)	520(W/m²)
Average Power Consumption	175(W/m²)	175(W/m²)	175(W/m²)	175(W/m²)	175(W/m²)	175(W/m²)
Inout Voltage	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz	AC110V~AC220V 50Hz/60Hz
Operating Temperature	-20℃~60℃	-20℃~60℃	-20℃~60℃	-20℃~60℃	-20℃~60℃	-20℃~60℃
Operating Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
Cabinet Material	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cabinet Weight	7.5kg/panel	7.5kg/panel	7.5kg/panel	7.5kg/panel	7.5kg/panel	7.5kg/panel
Operating System	Windows (Win7,Win8,etc.)	Windows (Win7,Win8,etc.)	Windows (Win7,Win8,etc.)	Windows (Win7,Win10,etc.)	Windows (Win7,Win10,etc.)	Windows (Win7,Win10,etc.)
Signal Source Compatibility	etc	etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc	DVI,HDMI1.3,DP1.2,SDI,HDMI2.0,etc