




直形箱体Straight cabinet

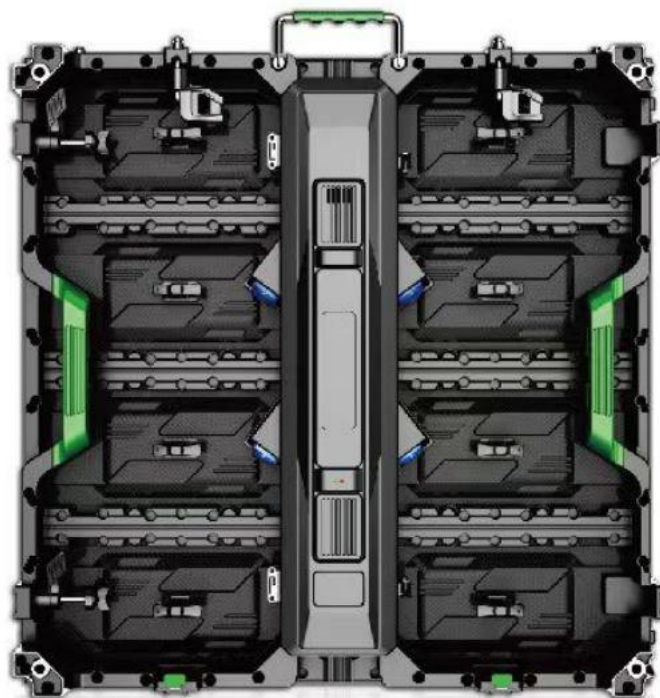

弧形箱体Curve cabinet

FI2 D Series

参数Specification

P1.25 P1.53 P1.86 P2 P2.5



320x160mm **640D**

箱体尺寸Size	640mmX640mmX66.5mm
箱体重量Weight	5.1kg (铝门板/不含套件与电源/Aluminum door/Not include suite and power supply)
材质Material	铝Aluminum
单箱套件数Single cabinet suite number	每箱6个模组6modules per cabinet
安装方式Installation	吊梁吊装及固定安装Crane girder hoisting and fixed installation
颜色Color	黑色 Black
使用环境Working environment	室内室外均可/Both indoor and outdoor
标准配件Standard accessories	1个门板、1个提手、2个定位销、1.3个连接片、4套快速锁(2套快速锁+2套弧度锁) 1 door、1 handle、2 positioning pins、1.3 Connection pieces、4 quick locks(quick locks+2 Radian locks)

细节展示The details show





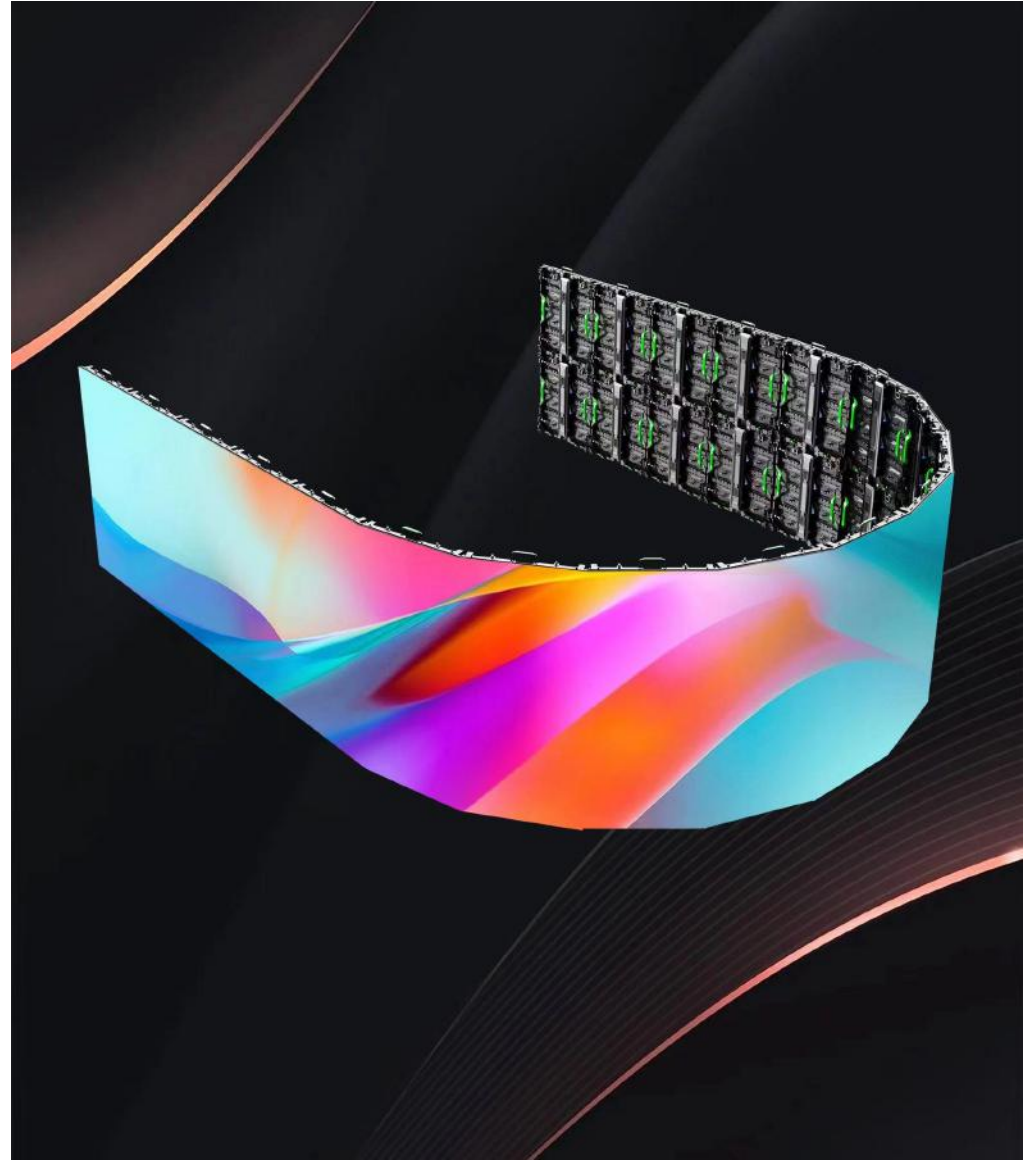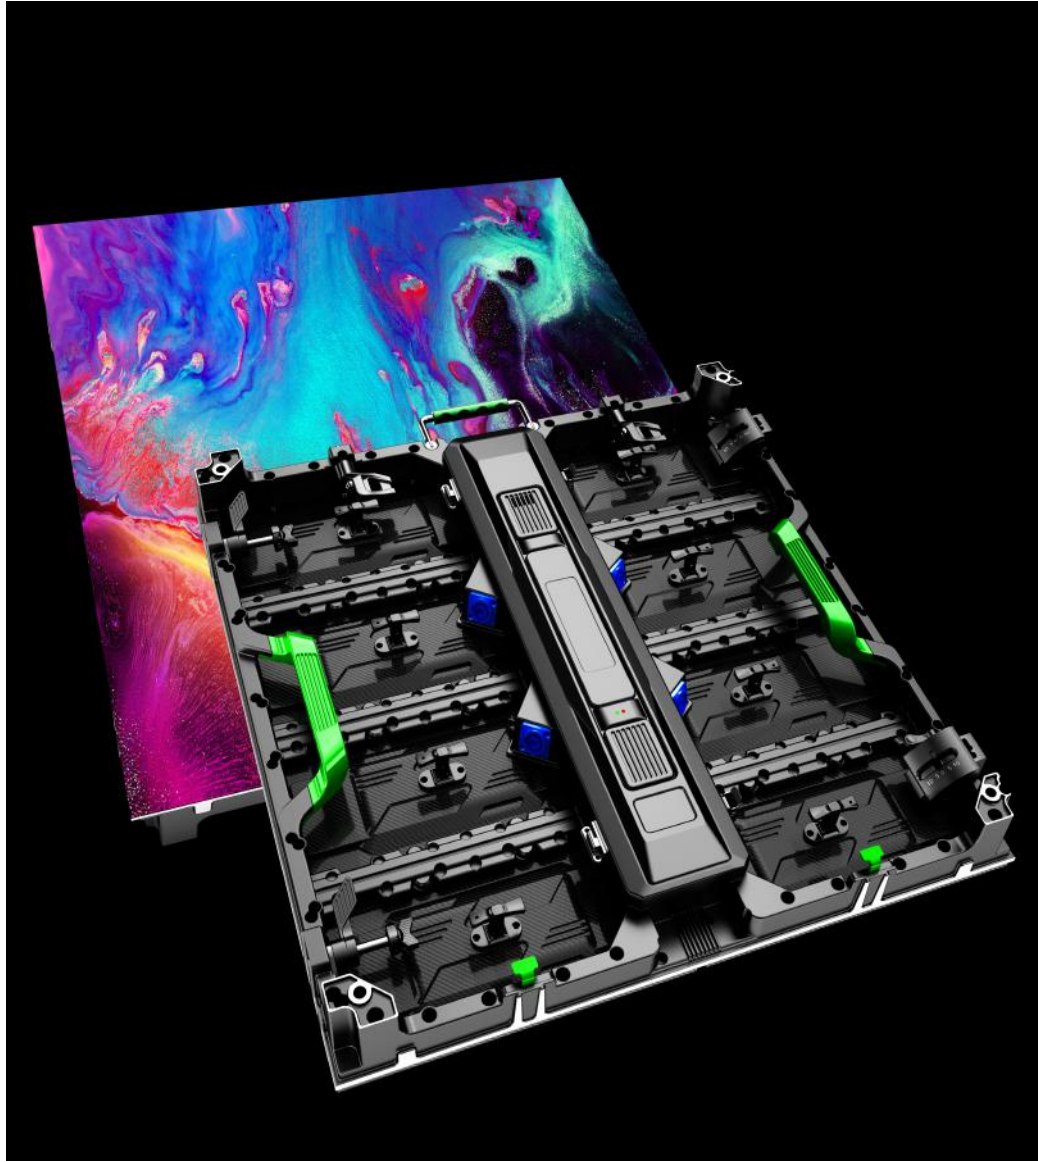





Indoor Fixed Installation Solution

FI2 D Series

Pixel Pitch	P1.25	P1.53	P1.86	P2	P2.5
LED Type	SMD1010	SMD1212	SMD1515	SMD2020	SMD2020
Physical Density (dots/m ²)	640000	428613	288906	250000	160000
Module Resolution	256×128	209×105	172×86	160×80	128×64
Module Size(W×H)	320×160	320×160	320×160	320×160	320×160
Cabinet Size(mm)	640×640×66.5	640×640×66.5	640×640×66.5	640×640×66.5	640×640×66.5
Cabinet Resolution	512×512	418×418	344×344	320×320	256×256
Cabinet Weight(kg)	13.0	13.0	13.0	13.0	13.0
Maintenance Mode	Front&Back maintenance	Front&Back maintenance	Front&Back maintenance	Front&Back maintenance	Front&Back maintenance
Cabinet Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Brightness	600-800cd	600-800cd	600-800cd	600-800cd	600-800cd
Viewing angle(H/V)	140° /140°	140° /140°	140° /140°	140° /140°	140° /140°
The best viewing distance	≥1.25m	≥1.53m	≥1.86m	≥2m	≥2.5m
Drive Mode	Static, 1/60 Scan	Static, 1/52 Scan	Static, 1/43 Scan	Static, 1/40 Scan	Static, 1/32 Scan
Grey Level	16 bit	16 bit	16 bit	16 bit	16 bit
Refresh Rate(Hz)	3840	3840	3840	3840	3840
Max Power Consumption(W/m ²)	900	900	900	900	900
Average Power Consumption(W/m ²)	100-200	100-200	100-200	100-200	100-200
IP Grade	IP43	IP43	IP43	IP43	IP43
Input Power	AC90-264V, 47-63 Hz				
Working Temperature/Humidity (°C/RH)	-20-60°C/10%-90%				
Storage Temperature/Humidity (°C/RH)	-30-70°C/10%-90%				