



1. *What is the primary purpose of the study?*




A close-up photograph of a white car's side profile. A black racing stripe runs along the side, and a black door handle is visible. The background is dark.

A close-up, low-angle shot of the rear wheel of a motorcycle. The wheel is black with a multi-spoke design. The motorcycle's body is white with black accents, including a black seat and black side panels. The background is dark and out of focus.




WIDE VIEWING ANGLE

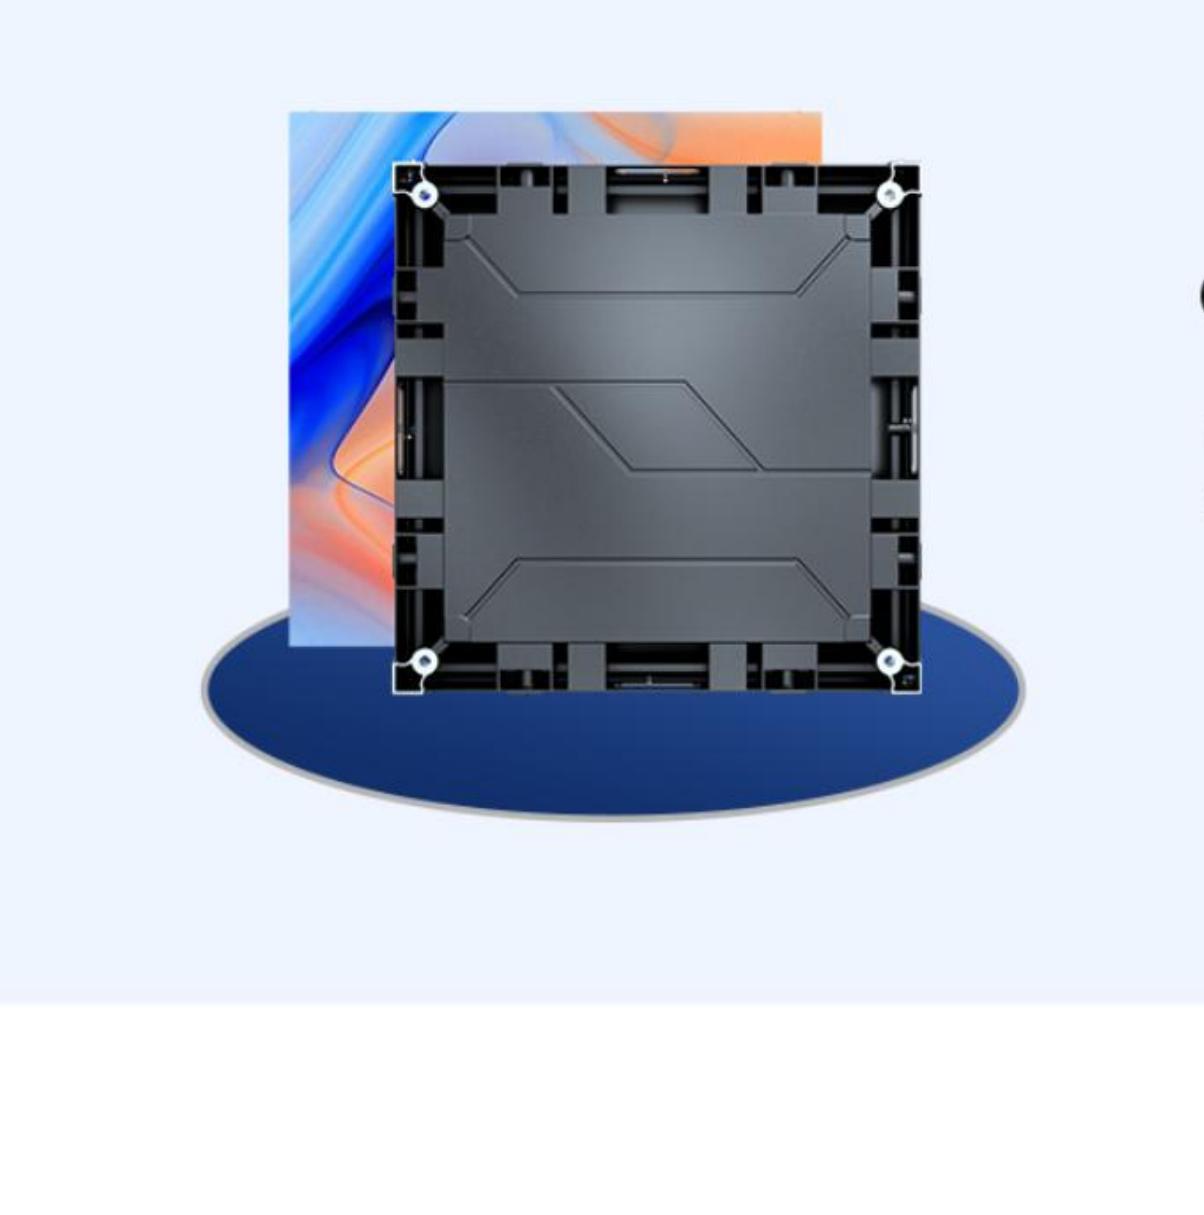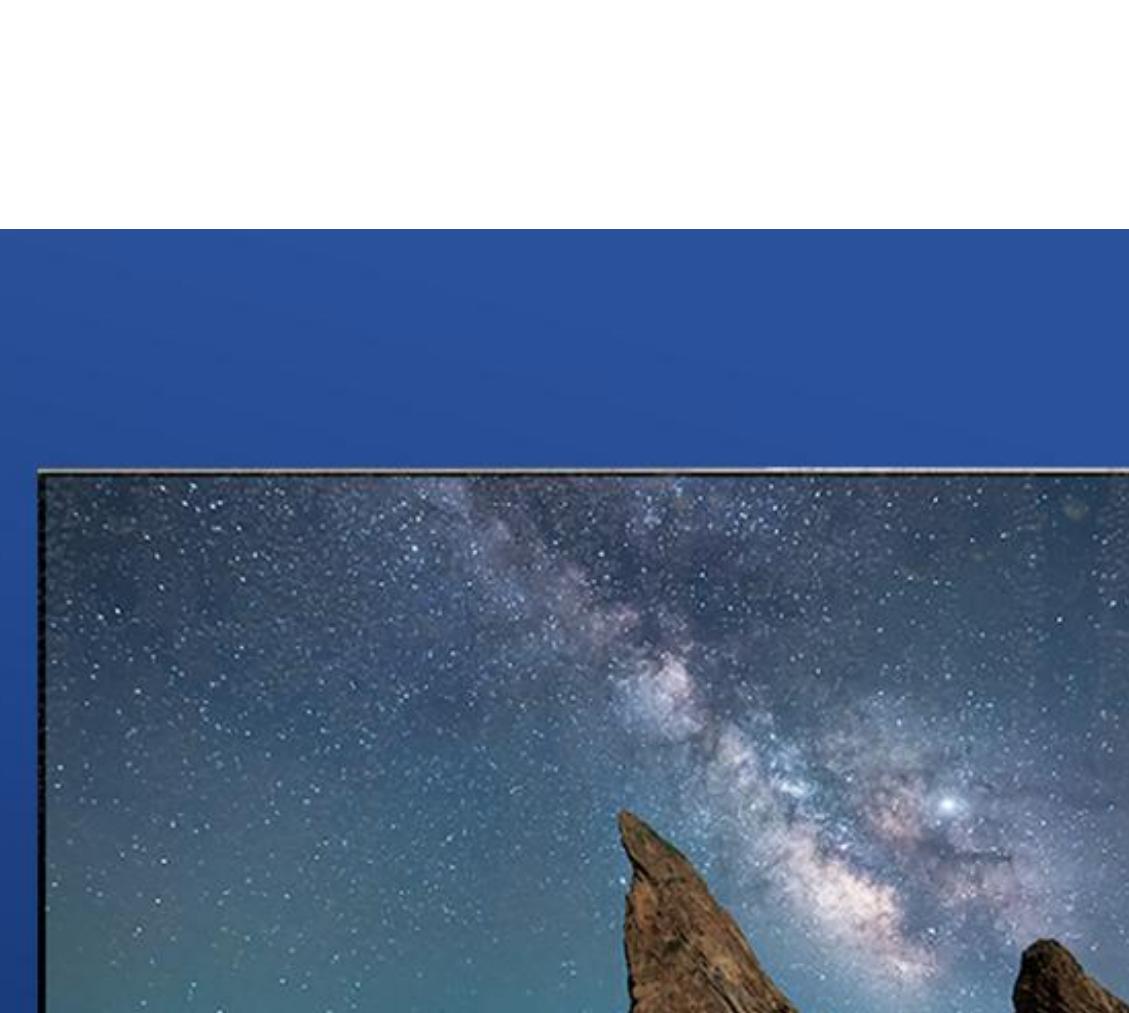

S-Series is special and can directly makes 45 degrees bevel right corner.

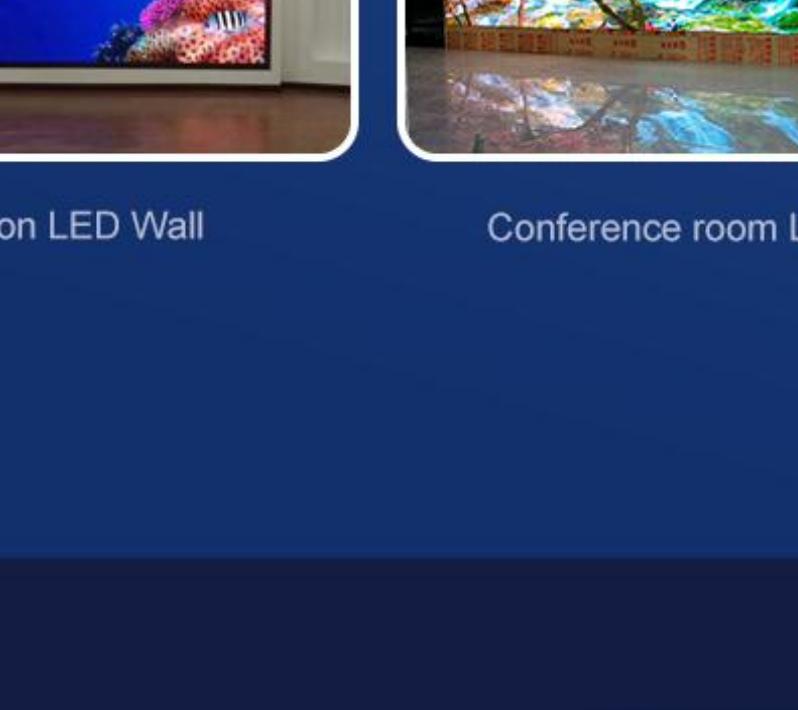



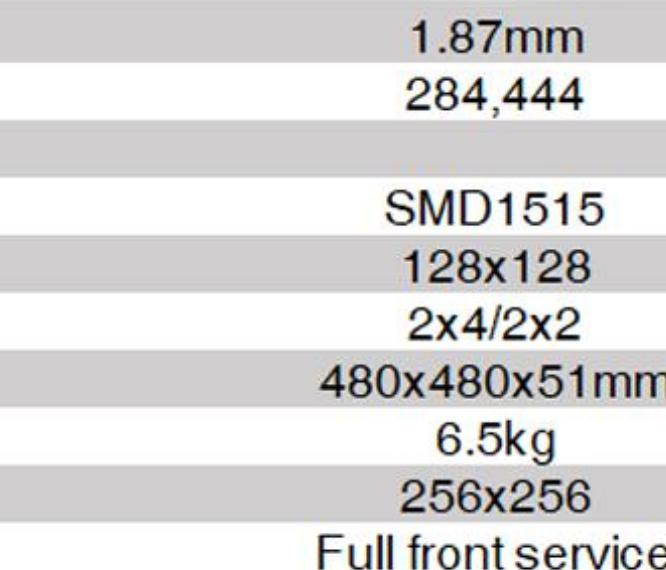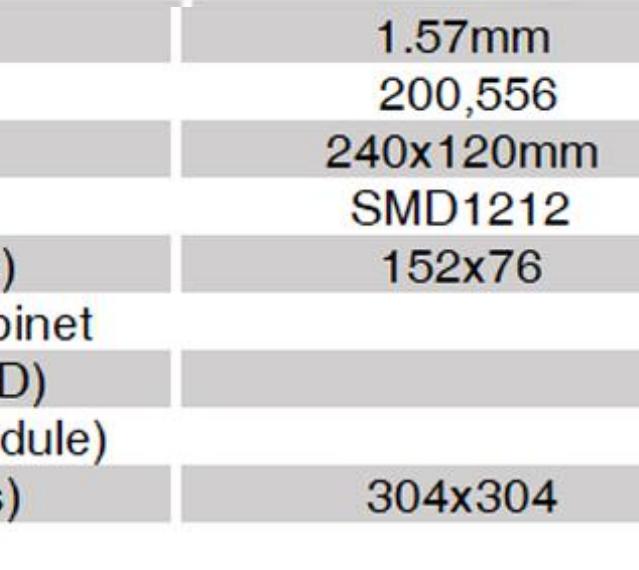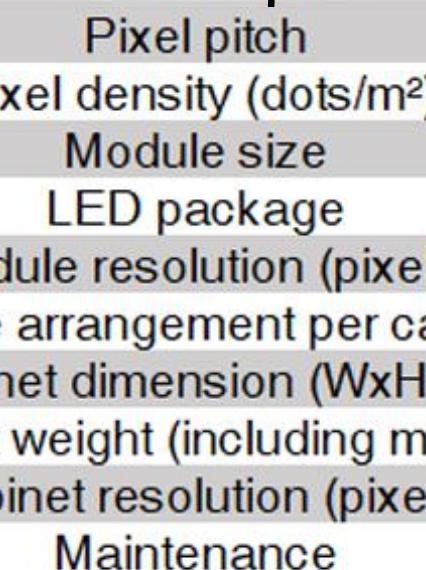

≥99%	14-16bits	5,000:1
1/38	1/64	1/32

Max./Avg. Power consumption	500W/m ² /165-260W/m ²
Storage temperature&humidity (RH)	-20°C - 50°C &35-75%
Working temperature&humidity (RH)	-10°C - 50°C &35-75%
IP rating	IP45
Screen temperature rise	≤5°C
Installation	On-wall/recessed/pedestal/suspended/stacked install
Signal&power backup system	Support
Signal output	HDMI/DVI/DP